

FrameXX

PICTURE OR FrameXX?



DIGITAL PHOTOFRAME

FrameXX



www.framexx.com

- presents pictures, videos and websites located in memory, LAN or internet
- 4S – Shot, Store, Synchronize, Show
- weather station – it can display weather forecast from 10 million locations, updated every minute from internet
- is suitable for any room design (color variations of wooden frame available)
- has very simple, intuitive control and allows autostart and synchronization when power is connected

FrameXX
HOME₁₅₀



- Size: 42 cm x 30 cm x 3 cm
- Modern metallic design (wooden core covered by metal foil)
- Matboard color (device) white and black
- 10 color frame versions as a standard accessories
- Custom frames available, also custom RAL/CMYK frame color
- TFT-LCD panel 15", resolution 1280 x 800 px, aspect ratio 16:10
- LED backlight, viewing angle +/- 170° (landscape), fullHD video (1920 x 1080 px) support
- Landscape and Portrait modes supported, orientation autosensing (internal G-sensor)
- Table holder supports Landscape and Portrait modes, VESA 75 mm (4 x M4)
- Low average power consumption (8W)
- Light weight (1 kg)
- Simple frame replacement (30 sec), tools not needed
- Operation control with Remote Control, buttons (on the rear side), via intranet (VPN) and via FrameXX cloud
- Power supply 100–240V / 12V/2A
- Wi-Fi B/G/N, LAN RJ-45
- 2 x 2 W internal speakers
- 1x stereo audio out (jack 3.5 mm)
- 3 x USB, 1 x SD/MMC, Internal Memory 6 GB



Portrait installation




FrameXX

HOME₂₇₁

- Size: 71 cm x 45 cm x 6.5 cm
- Modern wooden frame
More then 50 custom frames available
availability of custom RAL/CMYK frame color
- TFT-LCD Full HD panel 27"
- W-LED Backlight, viewing angle +/- 170°
horizontal, High static contrast,
Vivid&Crisp image,
Response time (typ): 1 ms (GtG),
Contrast ratio (typ): 1000:1
- Simple frame replacement
- Transparent 3 m power cable
- Wi-Fi B/G/N (2.4/5GHz)
- 2 x 2W internal speakers
- 2 x USB, Internal memory 13 GB




Basic custom designs



FrameXX

PRO_{SERIES}

- Industrial grade A-MVA/IPS full HD panel
- Size: PRO430a 106.8 cm x 65.9 cm x 6.5 cm
PRO431 107.0 cm x 66.2 cm x 4.5 cm
PRO480 118.1 cm x 72.3 cm x 6.5 cm
PRO491 120.0 cm x 73.3 cm x 4.9 cm
PRO550 138.5 cm x 85.5 cm x 6.5 cm
PRO551 138.8 cm x 85.7 cm x 4.9 cm
PRO650 157.1 cm x 94.8 cm x 6.9 cm
- Philips Ambilight® technology (PRO430a)
- Brightness 450 cd/m² (PROxx1)
or 350 cd/m² (PROxx0)
- Wi-Fi B/G/N (2.4 GHz) (PROxx1)
or Wi-Fi B/G/N (2.4/5 GHz) (PROxx0)
- Low average power consumption (typically
PRO431 56 W (EPA 6.0))
- LAN, 2 x 10W speakers, USB 2.0, uSD (PROxx1)
- Panel settings over LAN or CONTROL cloud
+ common features

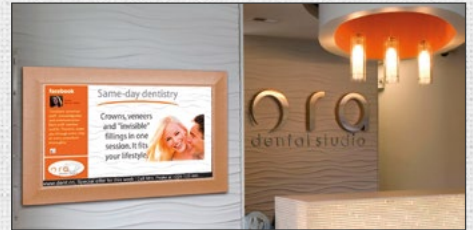

FrameXX

TAB_{SERIES}

- Size: 32–65" diagonal
- Solid wooden frame, customization available
- eAMVA/IPS industrial full HD panel
- All-in-one solution, built-in Android computer,
processor 4-core (2,0 GHz), 1 GB flash RAM,
16 GB flash NAND
- Neutral rooted firmware OS 4.4.2, Google play
included, bottom gesture bar optional
(full screen support)
- Multi-touch control (6–100)
- Panel protected by 4.5 mm glass (security
sandwich type), anti-glare surface (AG,1 side)
- Landscape/Portrait orientation
- 1 x USB, 1 x Wi-Fi B/G/N (2.4/5 GHz), 1 x LAN



FrameXX

SIGN₂

DIGITAL
SIGNAGE

- Size: 10.6 cm x 10 cm x 2.4 cm
- Ruggedized metal housing, internal real time clock
- Internal & external IrDA receiver (1 m cable)
- Wi-Fi removable external antenna (SMA type)
- LAN, Wi-Fi B/G/N (2.4/5 GHz), IrDA, HDMI
(4K video 3840 x 2160 px)
- 2 x USB, 1 x SD, Internal memory 13 GB
- A/V (cinch), RS-232 (DB-9), optionally HDMI → VGA
- Universal metallic mount, HDMI cable 1.5 m
- Power supply 5V/2 A



FEATURES

- Wireless multimedia device operating from internal memory, external storage, Wi-Fi, UPnP, SMB, FTP, Flickr, Dropbox, YouTube or Internet
- Wireless connection Wi-Fi B/G/N and standard LAN (SIGN/PRO/TAB), wireless Miracast support
- Fanless design (silent operation)
- Photo slideshow (JPG, BMP, PNG, GIF, TIFF) with music in the background (MP3), up to 40 Mpx JPG support
- Video playback with resolution up to 4K (SIGN) 3840 x 2160 px (MPEG4, MKV, AVI, TS, FLV, MTS, 3GP), direct support for MOV (iPhone/iPad) and MP4 (Android), HTML5
- Autostart of the last Slideshow (any content)
- Landscape/portrait orientation, 50Hz/60Hz modes
- Playlist support

- Slideshow from all sub-directories (function "recursion"), non-streaming mode
- HTML video streaming support
- Advanced timers, scheduling, auto-synchronization
- Weather banner (current + 2-day forecast), RSS feed banner, Text banner, Picture banner, Solid and (semi) transparent background
- EXIF info + banner – basic & advanced values (photo info, text info, camera info, location info ...)
- Transition effects, Timing, Presentation speed, File order, Off-line autocopy ...
- File type mask, Date mask (fixed, floating)
- Context menu – Copy, Delete, Run ...

FrameXX

VPN

- Direct remote control within VPN/intranet via IP_address
- Detailed device settings supported
- No internet connection required

FrameXX

CONTROL

- Remote control via FrameXX cloud
- Centralized surveillance
- Advanced remote settings of devices
- Group operation
- Playlist support, Timers
- Remote Power ON/OFF
- Free license (limited features-but unlimited devices)
- Remote firmware update
- Detailed history log, ...



USAGE SCENARIOS

- **Households** – display vacation photos, send pictures to distant family, decorate for every season, use as an infotainment panel with precise internet weather forecast
- **Showrooms, Exhibitions, Lobbies, Museums, Galleries** – show multiple images in one place, create a high quality viewing experience with a nice atmosphere in customized wooden frames
- **Restaurants, Hotels, Shops** – save money on signs and change information quickly and often, provide informative details for customers
- **Corporate premises** – internal "information wall panel" presentations of their own events, employees photos
- **Schools, Authorities** – providing updated informations, education



```

Filename      : LV-3.JPG
File size     : 2890 kB
Dimensions    : 2560x1920
Orientation   : Horizontal (normal)
Created       : 2014:02:07 04:30:42

Title        :
Author       : Me
User comment : Last nig

Camera       : Panasonic
Model        : DMC-LF1
ISO          : 800
Exposure time : 1/30
Aperture     : 3.0
Focal length : 9.5 mm
Focal (EQ35mm) : 44 mm
Flash        : No Flash
Exposure program : Program
Exposure method : Pattern
White Balance : Manual
Digital zoom  : 0
Lens brand   : N/A
Lens model   : N/A
Lens specs   : N/A
Camera firmware : Ver.1.1
Exif version  : 2.30
            
```

Mon	Tue	Wed	Thu	Fri	Sat	Sun
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	1	2
3	4	5	6	7	8	9

01:48 20°C

Prague (Czech Republic)

24	7.2 mm	18°C
06	19.0 mm	20°C
06	0.3 mm	18°C
12	2.0 mm	20°C
12	3.3 mm	19°C
18	7.7 mm	21°C
18	1.2 mm	16°C
24	4.7 mm	19°C
16-16	16-17	17-18
		0.7mm

record ride --- Zirbel sets new U.S. hour record --- Lelanguan Qatar worlds' Ex

